



Two Way GSM Communicators

RT-2WC



Squadron 2way GSM communicator units are deployed in remote location like atm, banks, shops, home etc., to make a 2way communication from authenticated numbers only.


Features

- GSM-based 2-way voice communication units with an inbuilt speaker and microphone.
- 8 Ohms speaker.
- Highly sensitive microphone.
- User details storage capability.
- Power 12VDC, 2A.
- Auto calls receiver capability.
- User authentication and security are ensured.
- SMPS output voltage -12VDC /6 Amps.
- User Configuration through SMS.
- One ADMIN and a maximum 10 numbers of users are allowed to call.
- Rejects calls from unregistered users.
- Built-in two Predefined Configurator mobile numbers.
- Standard SIM is preferable for this unit, and it will be easy to use.
- SIM card Network 2G, 3G, 4G (VOLTE not supported).
- GSM 3dbi Patch antenna with 3 meter cable.

Product Selection

MODEL	COMMUNICATION	DIMENSIONS (W*H*D)mm
RT-2WC-D31	GSM SMS/ Calls. Wall mounted high power(single hook)	Size D3 100X 140X 88
RT-2WC-D32	GSM SMS/ Calls. Wall mounted high power(single hook)	Size D3*270X 250X 230
RT-2WC-D33	GSM SMS/ Calls. Ceiling mount	ϕ 160, H-98mm. ϕ 150mm (Cutout holes)
RT-PA12V2A	Power Adapter: 12VDC, 2A.	NA

Product Dimensions

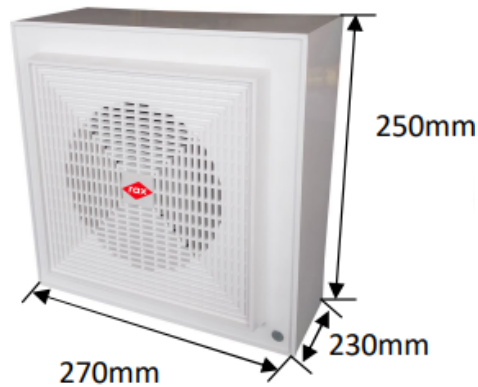

Calibration

This product is factory calibrated, No Field calibration is necessary for the life of this product.

Certification

CE certified, RoHS compliant, ISO 9001:2015

Warranty

1 Year warranty

Revision History

REV NO.	DATE	NO. OF PAGES	PREPARED BY	REVIEWED BY	APPROVED BY
1	19-05-25	03	RK	CT	AX

Disclaimer: The specifications and information provided in this datasheet are subject to change without prior notice. The manufacturer reserves the right to modify product features, design, and performance parameters at any time. Please verify the latest specifications before making purchasing or design decisions.
